



TANKSTANDS


*...for reliable
water pressure...*

**—maintenance free
—galvanised steel**


SOUTHERN CROSS galvanised steel tankstands provide elevated storage for reliable water pressure and ensure that a reservoir of water is always available in case of pump failure or other emergencies. The hot dip galvanised finish guarantees long maintenance-free life.

Standard sizes range from 1.5 to 15 metres, however SOUTHERN CROSS Tankstands are available for particular customer orders up to 30 metres high.

RURAL - DOMESTIC - INDUSTRIAL

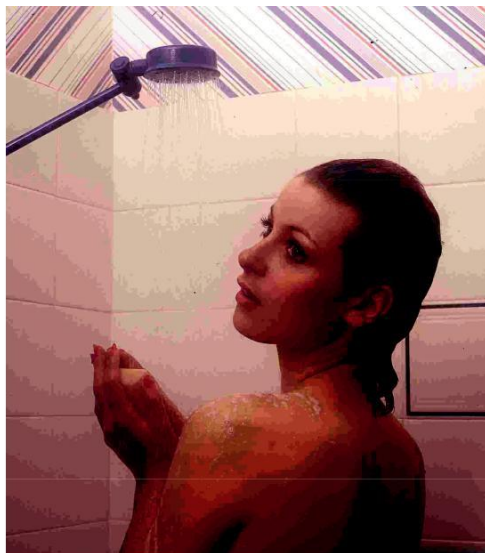

GALVANISED STEEL... TANKSTANDS

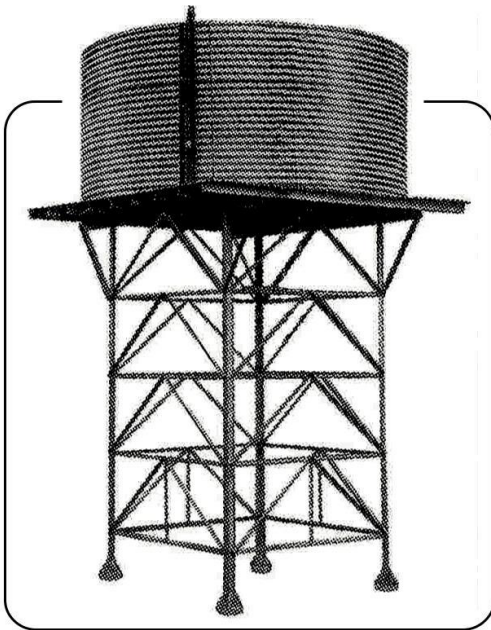

SOUTHERN CROSS galvanised steel tankstands are available in sizes from 1.5 to 15 metres above ground. All parts from the foundation bolts to the channel steel bearers— including the galvanised decking— are steel and HEAVILY GALVANISED to ensure protection against the costly damage caused by corrosion, •re, white ants and borers.

The table below sets out the various sizes of steel SOUTHERN CROSS tanks which can be used with standard SOUTHERN CROSS tankstands. SOUTHERN CROSS can manufacture and supply galvanised steel tankstands, larger than the standard range of sizes listed below, to suit particular customer requirements, for heights to 30 metres.

POLYETHYLENE, FIBREGLASS AND LINER TYPE TANKS:


Manufacturers of some of these types of tanks do not recommend the use of corrugated steel decking. For these installations, SOUTHERN CROSS can supply alternative materials or supply tankstands less decking, with suitable decking being supplied by the purchaser.

STANDARD TANKSTANDS USING THE SIZES AND TYPES OF TANKS LISTED BELOW ARE FOR USE IN NON-CYCLONIC RURAL AREAS. FOR SPECIAL APPLICATIONS PLEASE CALL.

Tank Stand	Corrugated Deck Size	Soldered Type Tanks 3 Sheets High (1.8m)		Squat. Soldered Type 2 Sheets high (1.2m)		Pre-fabricated Squatters Type Tanks (1.8m)	
GYC	1.8m x 1.8m	4.5kl	1000 gal.	2.7 kl	600 gal.	—	—
GXD	2.5m x 2.5m	9.0kl	2000 gal.	4.5kl	1000 gal.	9.0kl	2000 gal.
GXE	3.2m x 3.2m	13.5kl	3000 gal.	9.0kl	2000 gal.	15.0kl	3300 gal.
GXF	4.2m x 4.2m	17.5kl	4000 gal.	13.5kl	3000 gal.	22.5kl	4950 gal.
		22.5kl	5000 gal.				

Nominal Height Metres	Actual Height Above Ground Metres	Packed Mass (kg) (Including Galvanised Corrugated Decking)				Packed Mass (kg) (Less Decking)			
		GYC	GXD	GXE	GXF	GYC	GXD	GXE	GXF
1.5	1.68	172	307	538	889	149	261	462	762
3.0	3.20	256	392	635	1025	233	346	559	898
4.5	4.57	323	462	727	1155	300	416	651	1028
6.0	6.10	384	527	801	1272	361	481	725	1145
7.6	7.47	451	597	893	1402	428	551	817	1275
9.0	8.99	512	662	967	1519	489	616	891	1392
12.0	11.89	652	835	1181	1824	629	789	1105	1697
15.0	14.78	792	1008	1395	2129	769	962	1319	2002

As Ellis Tanks policy is one of constant improvement, we reserve the right to make specification changes without notice and without incurring liability.

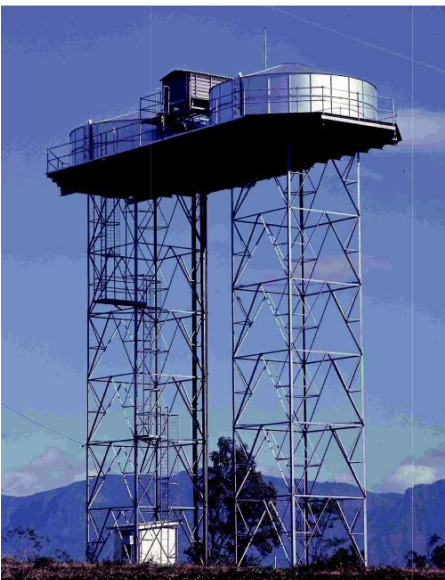

Form 2094B April 2008



Ph: 0427 716 087

e-mail: jason@ellistanks.com.au
web: www.ellistanks.com.au